

CLOPAY COMMERCIAL – MODELS CESG10, CESG11, CESG12

# rolling steel series


 Clopay®




Model CESG10 Door

## ROLLING GRILLES

- Rolling steel grilles provide after-hours security and space separation with visibility and airflow.
- Stainless steel, various anodized aluminum finishes and galvanized steel options are available.
- Straight pattern grilles can be fashioned with 3" (7.6 cm), 6" (15.2 cm) or 9" (22.9 cm) spacing. Other popular grille styles include brick pattern and glazed panel models.
- Structural self-supporting tubes are available for installation of grille before storefronts or walls are installed.

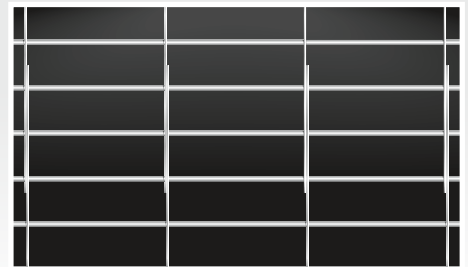

Straight Pattern Grille  
(2" x 3", 2" x 6", 2" x 9")

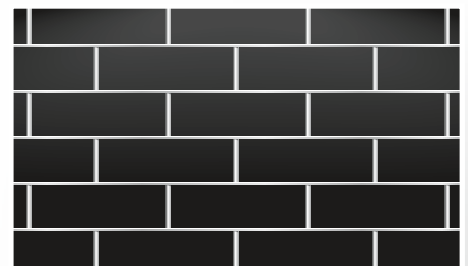

Brick Pattern Grille

Rolling grilles provide access control and after-hours security to interior and exterior openings, while permitting visual access to separated areas. Grilles are available for openings up to 40' (12.2 m) wide by 20' (6.1 m) high. Consult the factory for larger sizes.

## FEATURES

**Security** – Grilles prevent unauthorized access and discourage forced entry at building exterior openings, storefronts or areas within buildings, such as pharmacies or parts counters. Used behind plate glass storefronts, they are a deterrent to smash-and-grab crime.

**Aesthetics** – Curtains are available in either a straight (CESG10) or brick (CESG12) pattern in a variety of metal finishes from polished stainless, anodized aluminum in a clear or colored anodized finish, adding beauty as well as security to the interior or exterior of a building.

**Design Flexibility** – Clopay grilles are built-to-order to fit your opening size, operation and option preferences.

**Space Saving** – Curtain stores in a compact coil at the head of an opening to maximize the use of the interior space.

**Low Lifecycle Cost** – Clopay's rugged construction and quality materials assure long life and less costly maintenance.

## OPTIONS

**Operation** – Available operation options include push-up, hand crank, hand chain (face of wall mounted exposed guides only) and motor. Standard push-up operation is acceptable for grilles under 10' (3.1 m) in height or widths less than 16'4" (5 m). For wider grilles where push-up operation is desired, see the EZ Lift option below.

**Early Installation Option** – Early/easy self-supporting installation system lets grilles be fitted in before walls are built and before there is an opening. Structural tubular members, factory machined and fitted for grille guides and brackets, attach directly to the slab below and joists above ensuring proper fit and function of the grille unit.

**EZ Lift Push-Up Package for Wider Grilles** – The EZ Lift package allows push-up operation on aluminum grilles up to 22' (6.7 m) wide by 10' (3.1 m) high. This results in added savings in initial costs and long-term maintenance for building owners. Consult CIA for applicable sizes for stainless, galvanized steel and glazed panel grille (CESG11) series.

**Manual Release System** – For use with motor operated grilles, this manual release system is used to meet building code emergency egress requirements. A wall-mounted pull handle disengages the motor drive, which allows the grille to automatically open partway for egress. Releasing the pull handle resets the grille to normal operation.



For more information on these and other Clopay products, visit [clopaycommercial.com](http://clopaycommercial.com). Architects and specifiers, visit [architectdoorhelp.com](http://architectdoorhelp.com).



©2021 Clopay Corporation. All rights reserved.

## MODEL CESG10

### OPEN PANEL MODEL STRAIGHT PATTERN GRILLE



The Open Panel Model Straight Pattern Grille features an open curtain, which allows air circulation, with a series of horizontal rods 5/16" (7.9 mm) in diameter. Vertical O.C. separation between rods is 2" (50.8 mm) or 1-1/2" (38.1 mm). Rods are available in aluminum-mill, clear or color anodized finish, solid 300 series stainless steel polished or solid galvanized steel. Vertical chains are formed of eyeletted aluminum or stainless steel on 9" (22.9 cm), 6" (15.2 cm) or 3" (7.6 cm) spacing. End chains are held in place by double E-rings on horizontal rods on both sides of chain to retain curtain ends in guides.

## MODEL CESG12


### OPEN PANEL MODEL BRICK PATTERN GRILLE



Horizontal 5/16" (7.9 mm) diameter solid aluminum rods at 2" (50.8 mm) centers. Rods supported by heavy-duty aluminum links, held in staggered position by tube spacers throughout the entire curtain assembly. Available in aluminum-mill, clear or color anodized finish in alloy 5056 H32. High cycle construction (high cycle shaft and springs) available. Contact Clopay Commercial Information Assistance (CIA) with cycle requirements.

## MODEL CESG11

### GLAZED PANEL MODEL



An option available for increased protection from theft of small articles through the curtain, the Clopay glazed panel grille is constructed of clear 12" x 3" (30.5 cm x 7.6 cm), 1/8" (3.2 mm) thick Lexan® (or equal) panels. The flame retardant polycarbonate panels are secured to bronze color molded nylon links attached to 5/16" (7.9 mm) diameter solid aluminum horizontal rods of alloy 5056 H32, creating a barrier against refuse, odors and smoke.

## DISTRIBUTED BY:



CMDC-RGRILLE-10\_REV0721